d Rim


Manual guide

Dear Customer

Thank you for choosing our product. We are sure that it will fulfil all your expectation: We wish you satisfaction from your choice of the fan and its usage.

>Attention!


Cut off the power supply in the electrical installation before the connection.

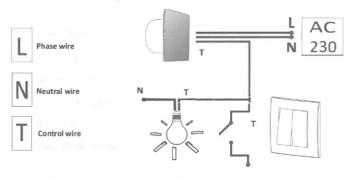

Content of the box




Useful tools

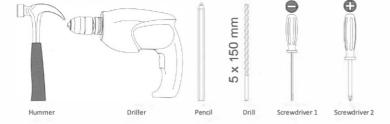


Grill disassembly







Lid disassembly
















Fan installation

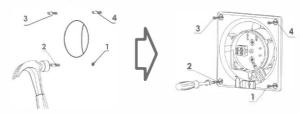


Insert the wire and fasten it using the holder



Electrical connection of S and PS version

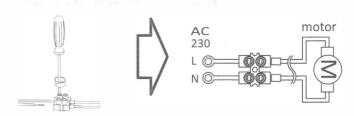

Electrical connection of TS, HS and RMS version

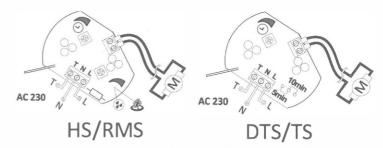

It is possible to set the fan operating time on potentiometer by using a screwdriver in fans with electrical control system (TS, HS and RMS version).

TS		Timer Sensor (The fan operates from 3 to 23 minutes after switching off the light).
DTS	٩	Delayed timer (Fan start working 5 or 10 minutes after we turn on device and working 3 or 2 minutes after we turn off device.
HS	۵۵۵	Higro Sensor (The fan dries the room depending on chosen humidity level from 40% to 80%
RMS	B	Movement Sensor (The fan turns on depending on chosen sensitivity degree. The sensor ha the reach of Sm from the device).

Parameter adjustment in TS, HS and RMS version

